
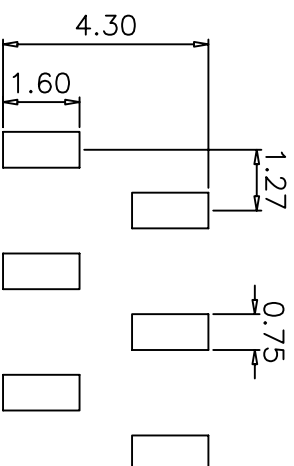


SPECIFICATIONS
 Current Rating: 1.0 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 300V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: PA6T
 Soldering Temperature: +260°C, 5S~8S max



P.C.B LAYOUT

OPERATION		DRAW		SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
~ 10	±0.15	DESIGN	ROSE.W	2001.03.06	mm		
20 ~ 30	±0.30	CHECK	MICKY	2001.03.06	A4	PART NO. FH127H200-SMT-XXP	
30 ~	±0.50	APPROVE	HELLEN	2001.03.06	1/1	TITLE: 1.27mm Female Header Single Row Straight SMT Type	
Angle	± 2'						
DIM	TOL						
1	2	3	4	5	6	7	8
0	05/12/27	NEW					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE			