
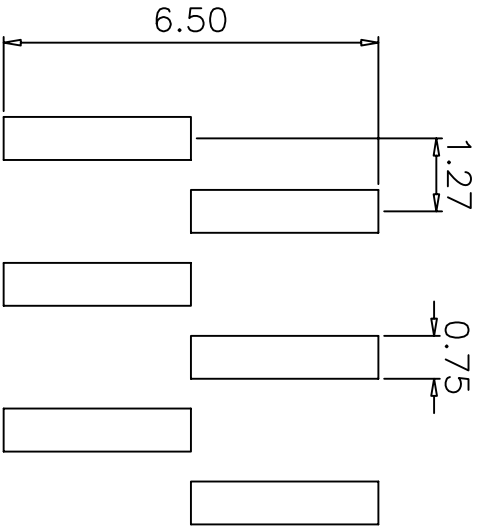


**SPECIFICATIONS**  
 Current Rating: 1.0 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 300V AC/minute  
 Temperature Range: -40~+105°  
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: Nylon6T, UL94V-0  
 Soldering Temperature: +260°C, 5S~8S max

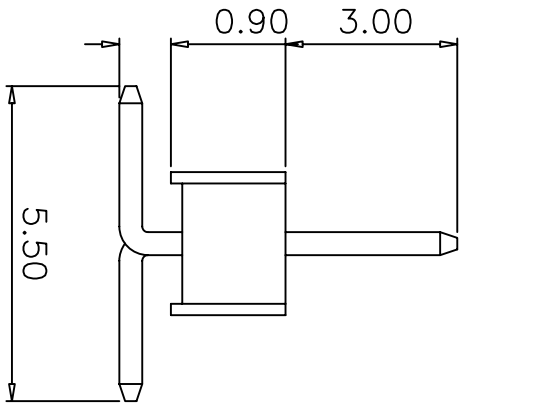

P.C.B LAYOUT

OPERATION		~ 10	±0.15	DRAW		ROSE W	2001.03.06	SCALE		mm
DESIGN		20 ~ 30	±0.30	CHECK		MICKY	2001.03.06	UNIT		A4
ANGLE		30 ~	±0.50	APPROVE		HELLEN	2001.03.06	SHEET		1/1
DIM			± 2'	APPROVE				PROJ.		
TOL				CHANGE				PART NO.		PH127H200-SMT-XXP
APPROVE				DESCRIPTION				TITLE:		1.27mm Pin Header Single Row Straight SMT Type
DATE		05/12/27		NEW				森康达电子有限公司		
REV		0		MODIFICATION				SCONDAR		
DATE				DESCRIPTION				SCONDAR ELECTRONIC LIMITED		