

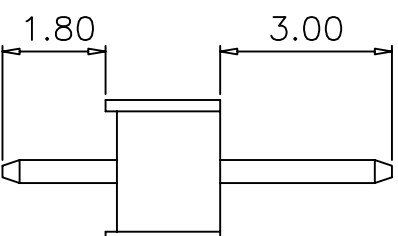


0.40/0.46SQ

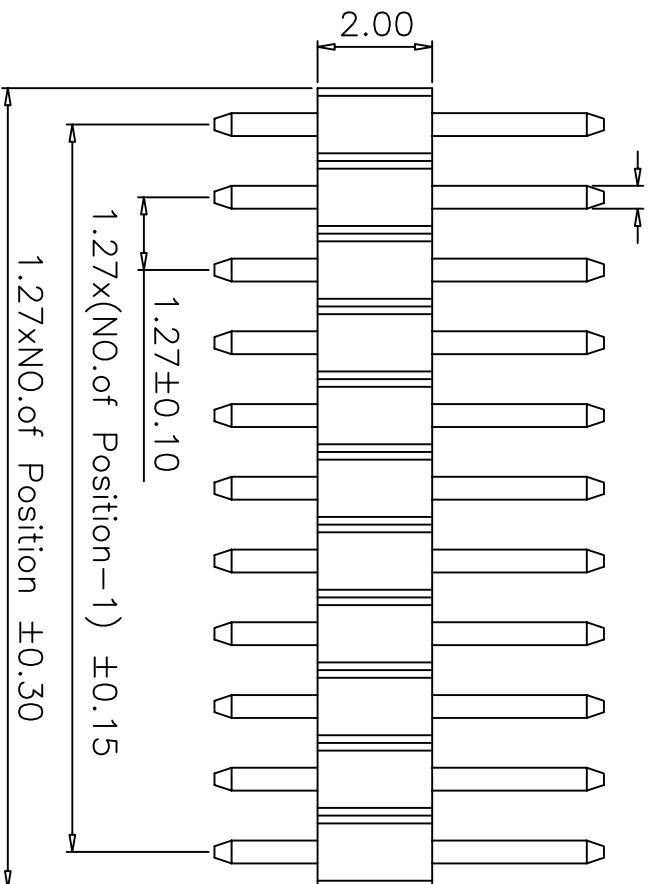

P.C.B LAYOUT

**SPECIFICATIONS**

Current Rating: 1.0 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 300V AC/minute  
 Temperature Range: -40~+105°  
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: Nylon6T, UL94V-0  
 Soldering Temperature: +220°C, 10S max

OPERATION		DRAW		SCALE		SCONDAR 森康达电子有限公司	
~ 10	±0.15	ROSE.W	2001.03.06	UNIT	mm	SCONDAR ELECTRONIC LIMITED	
20 ~ 30	±0.30	DESIGN		SIZE	A4	PH127H200-ST-XXP	
30 ~	±0.50	CHECK	2001.03.06	SHEET	1/1	1.27mm Pin Header Single Row Straight Dip Type	
Angle	± 2'	APPROVE	2001.03.06	PROJ.			
DIM	TOL	HELLEN					
MODIFICATION DESCRIPTION		CHANGE APPROVE		TITLE:			
0	05/12/27	NEW					
REV	DATE						