


**SPECIFICATIONS**  
 Current Rating: 1.5 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 450V AC/minute  
 Temperature Range: -40~+105°  
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: PBT  
 Soldering Temperature: +220°C, 10S max

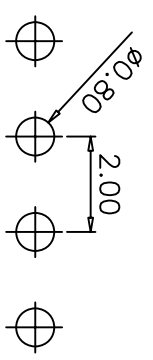

P.C.B LAYOUT

|           |          |                          |         |         |            |       |       |        |   |   |
|-----------|----------|--------------------------|---------|---------|------------|-------|-------|--------|---|---|
| OPERATION | ~ 10     | ±0.15                    | DRAW    | ROSE.W  | 2001.03.06 | SCALE | UNIT  | mm     | <br>森康达电子有限公司<br>SCONDAR ELECTRONIC LIMITED | PH200H200-ST-XXP<br>2.0mm Pin Header Single Row Straight Dip Type |
| DESIGN    | 20 ~ 30  | ±0.30                    | CHECK   | MICKY   | 2001.03.06 | SIZE  | A4    |        |   |   |
| ANGLE     | 30 ~     | ±0.50                    | APPROVE | HELLEN  | 2001.03.06 | SHEET | 1/1   | TITLE: |   |   |
| REV       | DATE     | MODIFICATION DESCRIPTION | CHANGE  | APPROVE | DIM        | TOL   | PROU. |        |   |   |
| 0         | 05/12/27 | NEW                      |         |         |            |       |       |        |   |   |