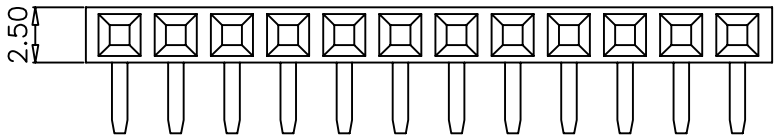


SPECIFICATIONS
Current Rating:3 Amps
Insulator Resistance:1000 Megohms Min.
Withstanding Voltage:550V AC/minute
Temperature Range: −40~+105°
Contact material:Brass
Finish: Gold or Tin plated
Insulator Material:PBT
Soldering Temperature:+220°C,10S max

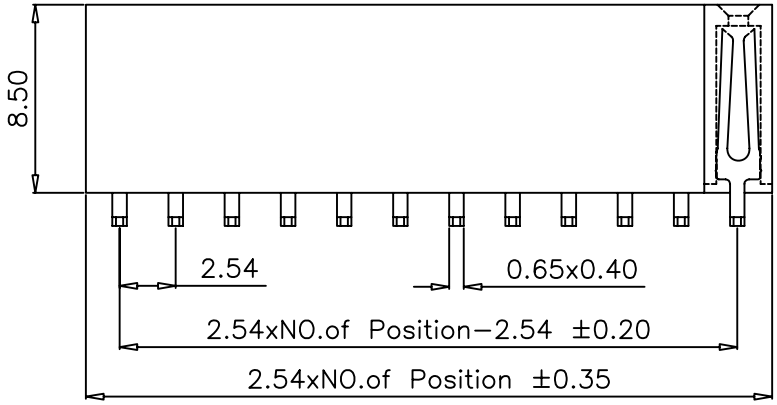








P.C.B LAYOUT

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE |
|---|---|---|---|---|
| 0 | 05/12/27 | NEW | ——— | ——— |

| OPERATION | |
|---|---|
| ~ 10 | ±0.15 |
| 20 ~ 30 | ±0.30 |
| 30 ~ | ±0.50 |
| Angle | ± 2° |
| DIM | TOL |

| | | |
|---|---|---|
| DRAW | ROSE.W | 2001.03.06 |
| DESIGN | | |
| CHECK | MICKY | 2001.03.06 |
| APPROVE | HELLEN | 2001.03.06 |

| | |
|---|---|
| SCALE | |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

| | |
|---|---|
| PART NO. | FH254H850−RT−XXP |
| TITLE: | 2.54mm Female Header Single Row Right Angle Dip Type |