



SPECIFICATIONS
 Current Rating: 1.5 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 450V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: PBT
 Soldering Temperature: +220°C, 10S max

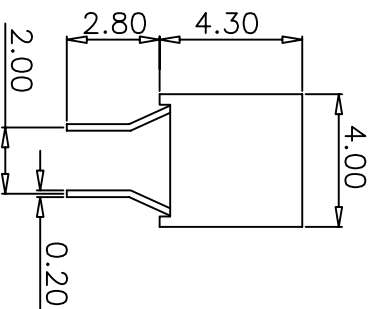

P.C.B. LAYOUT

OPERATION	~ 10	±0.15	DRAW	ROSE.W	2001.03.06	SCALE			森康达电子有限公司 SCONDAR ELECTRONIC LIMITED
DESIGN	20 ~ 30	±0.30	CHECK	MICKY	2001.03.06	UNIT	mm		
ANGLE	30 ~	±0.50	CHECK	HELLEN	2001.03.06	SIZE	A4	PART NO.	FH200H430-ST-2XXXP
DIM	± 2'		APPROVE			SHEET	1/1	TITLE:	2.0mm Female Header Double Row Straight Dip Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		PROJ.			
0	05/12/27	NEW							

1 2 3 4 5 6 7 8 9 10