
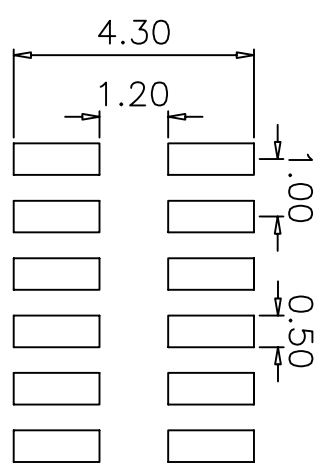



0.30x0.15

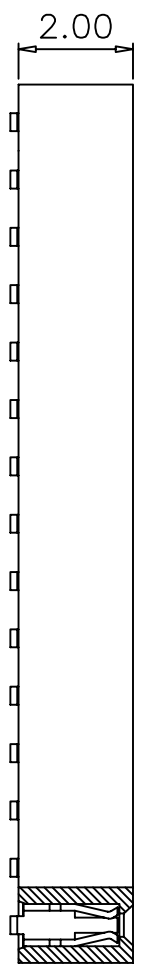

P.C.B LAYOUT

SPECIFICATIONS
 Current Rating: 0.75 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 300V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: Nylon6T, UL94V-0
 Soldering Temperature: +260°C, 5S~8S max

OPERATION	~ 10	±0.15	DRAW	ROSE.W	2001.03.06	SCALE	mm	SCONDAR 森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	PART NO. FH100H200-SMT-2XXXP
DESIGN	20 ~ 30	±0.30	CHECK	MICKY	2001.03.06	A4			
ANGLE	30 ~	±0.50	APPROVE	HELLEN	2001.03.06	1/1			
DATE	05/12/27	NEW	CHANGE			PROJ.		TITLE	1.0mm Female Header Double Row Straight SMT Type
REV	0	MODIFICATION DESCRIPTION	APPROVE						