SPECIFICATIONS
Current rating:1 Amps
Insulator resistance:5000 megohms Min.
Dielectric withstanding:AC 500 V
Operating Temperature: -40~+105°
Contact material:brass/phosphor bronze
Insulator material:standard Nylon-6T UL 94V-0
Finish: gold flash or Tin plated or Duplex plating
Max processing temp:230° for 30-60 seconds. (260° for 10 seconds.)

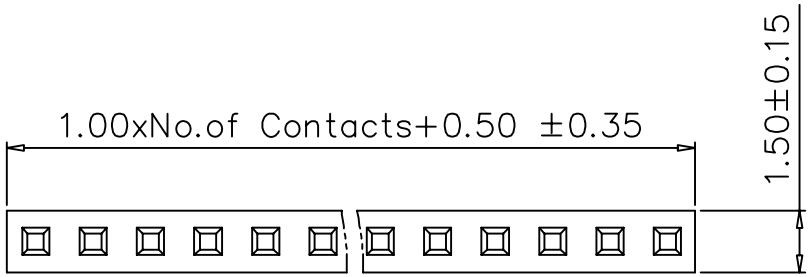

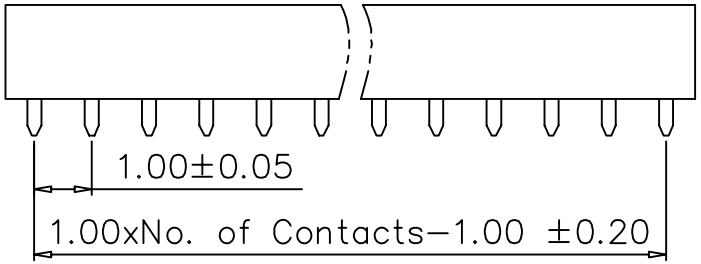



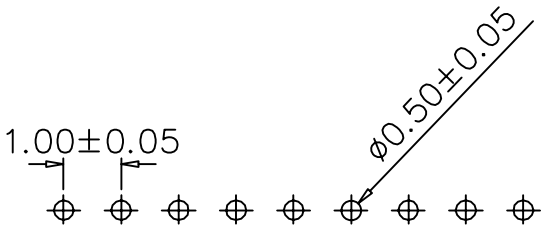

P.C.B LAYOUT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
0	05/12/27	NEW	———	———

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW		2015.06.01
DESIGN		
CHECK	JET YU	2015.06.01
APPROVE		2015.06.01

SCALE	
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR 森康达电子有限公司
S'CONDAR ELECTRONIC LIMITED

PART NO.	FH100H200-ST-1xXXP
TITLE:	1.0 FEMALE HEADER
DRAWING NO.	FH100H200-ST-1xXXP