



SPECIFICATIONS
 Current Rating: 1.0 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 300V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: Nylon6T, UL94V-0
 Soldering Temperature: +220°C, 10S max

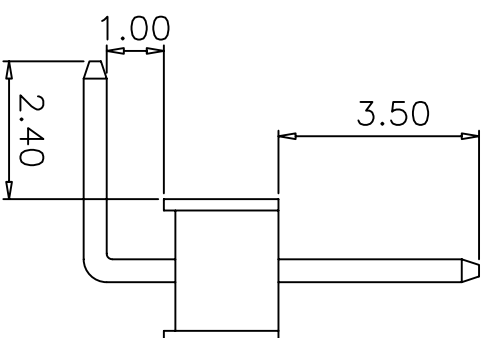

P.C.B LAYOUT

OPERATION	~ 10	±0.15	DRAW	ROSE W	2001.03.06	SCALE	
DESIGN	20 ~ 30	±0.30	MICKY	2001.03.06	UNIT	mm	
CHECK	30 ~	±0.50	HELLEN	2001.03.06	SIZE	A4	
APPROVE	Angle	± 2'			SHEET	1/1	
APPROVE	DIM	TOL			PROJ.		
DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		PART NO.	PH127H200-RT-XXP	
05/12/27	NEW				TITLE:	1.27mm Pin Header Single Row Right Angle Dip Type	
REV							

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED