
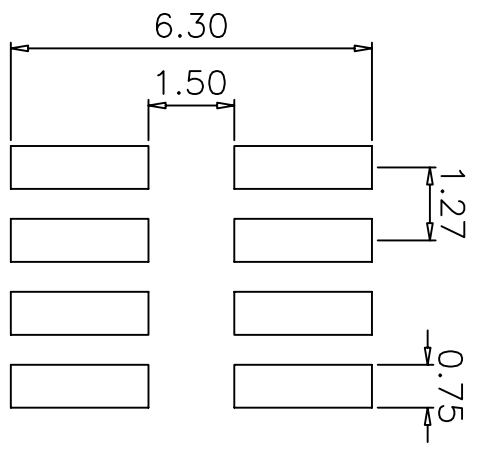
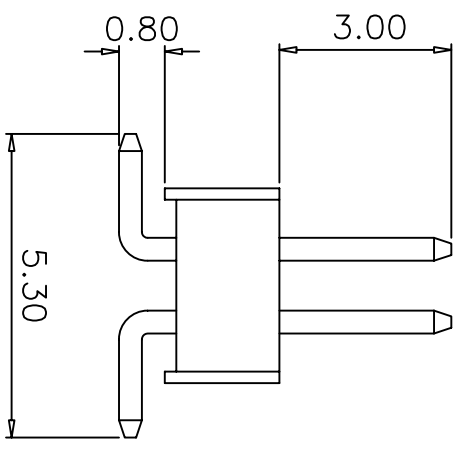


SPECIFICATIONS
 Current Rating: 1.0 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 300V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: Nylon6T, UL94V-0
 Soldering Temperature: +260°C, 5S~8S max

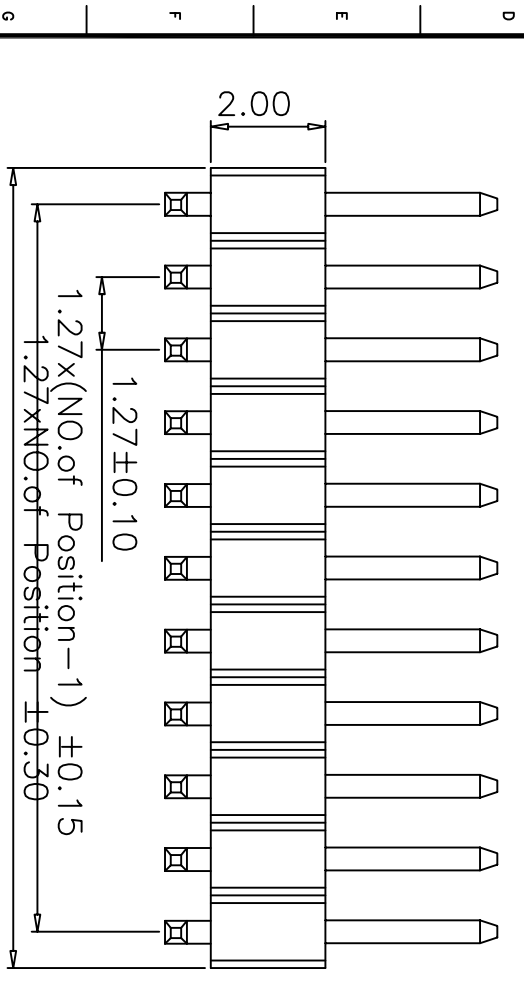

P.C.B LAYOUT

OPERATION		DRAW		SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
~ 10	±0.15	ROSE.W	2001.03.06	UNIT	mm		
DESIGN		CHECK		SHEET		PART NO. PH127H200-SMT-2XXXP TITLE: 1.27mm Pin Header Double Row Straight SMT Type	
20 ~ 30	±0.30	MICKY	2001.03.06	SIZE	A4		
ANGLE		APPROVE		PROJ.			
30 ~	±0.50	HELLEN	2001.03.06				
DIM		APPROVE					
± 2'							
TOL							
CHANGE							
APPROVE							
DESCRIPTION							
NEW							
DATE							
05/12/27							
REV							
0							