

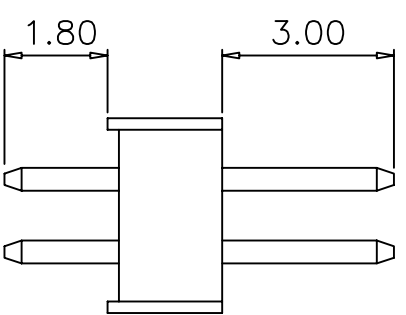


**SPECIFICATIONS**  
 Current Rating: 1.0 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 500V AC/minute  
 Temperature Range: -40~+105°  
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: Nylon6T, UL94V-0  
 Soldering Temperature: +220°C, 10S max

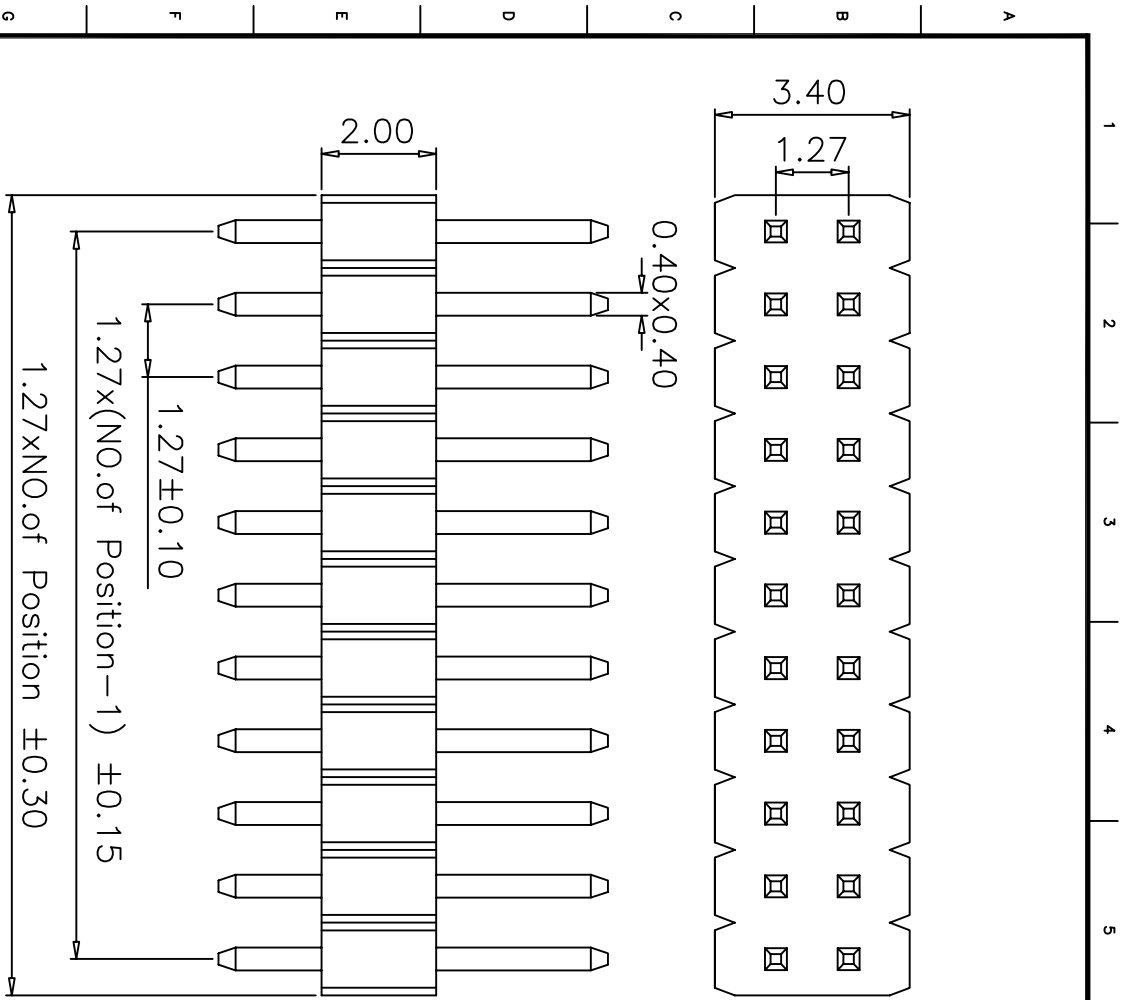

P.C.B LAYOUT



OPERATION		DRAW		SCALE		SCONDAR 森康达电子有限公司	
~ 10	±0.15	ROSE.W	2001.03.06	UNIT	mm	SCONDAR ELECTRONIC LIMITED	
DESIGN		CHECK		SIZE		PART NO.	
20 ~ 30	±0.30	MICKY	2001.03.06	A4		PH127H200-ST-2XXXP	
ANGLE		APPROVE		SHEET		TITLE:	
30 ~	±0.50	HELLEN	2001.03.06	1/1		1.27mm Pin Header Double Row Straight Dip Type	
DIM		APPROVE		PROJ.			
± 2'							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		APPROVE	
0	05/12/27	NEW					
1							