



**SPECIFICATIONS**  
 Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 550V AC/minute  
 Temperature Range: -40~+105°  
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: PBT  
 Soldering Temperature: +220°C, 10S max

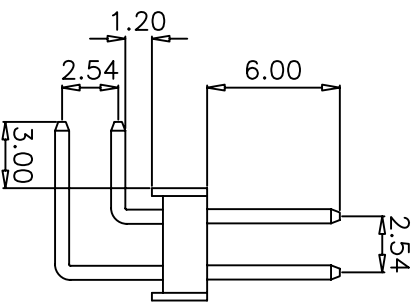

P.C.B LAYOUT

OPERATION		~ 10	±0.15	DRAW		ROSE W	2001.03.06	SCALE	
DESIGN		20 ~ 30	±0.30	CHECK		MICKY	2001.03.06	UNIT	
ANGLE		30 ~	±0.50	APPROVE		HELLEN	2001.03.06	SIZE	
DIM		± 2'	± 2'	APPROVE		HELLEN	2001.03.06	SHEET	
TOL		± 2'	± 2'	APPROVE		HELLEN	2001.03.06	PROJ.	
CHANGE				APPROVE				PART NO.	
DESCRIPTION		NEW		APPROVE				PH254H250-RT-2XXXP	
DATE		05/12/27		APPROVE				TITLE:	
REV		0		APPROVE				2.54mm Pin Header Double Row Right Angle Dip Type	

**SCONDAR** 森康达电子有限公司  
 SCONDAR ELECTRONIC LIMITED