
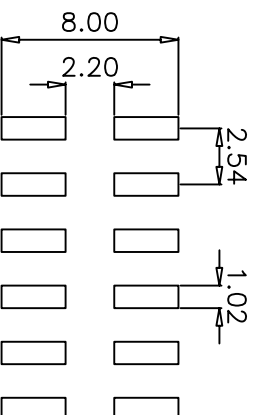


SPECIFICATIONS
 Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 550V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: PA6T, UL94V-0
 Soldering Temperature: +260°C, 5S~8S max

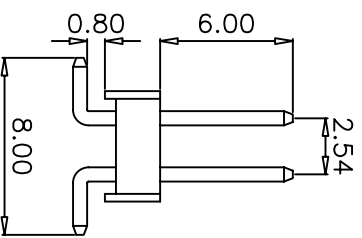

P.C.B LAYOUT

OPERATION		~ 10	±0.15	DRAW		ROSE W	2001.03.06	SCALE	SCONDAR 森康达电子有限公司	
DESIGN		20 ~ 30	±0.30	CHECK		MICKY	2001.03.06	UNIT	SCONDAR ELECTRONIC LIMITED	
ANGLE		30 ~	±0.50	APPROVE		HELLEN	2001.03.06	SIZE	PH254H250-SMT-2XXXP	
DIM		± 2'		APPROVE				SHEET	2.54mm Pin Header Double Row Straight SMT Type	
TOL				CHANGE				PROJ.		
DATE		MODIFICATION DESCRIPTION		APPROVE				TITLE:		
05/12/27		NEW								
REV										
0										