
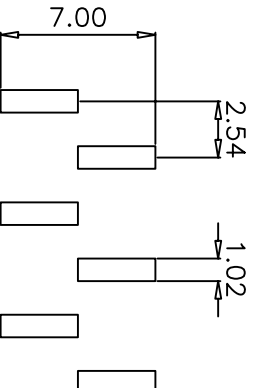


SPECIFICATIONS
 Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 550V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: PA6T, UL94V-0
 Soldering Temperature: +260°C, 5S~8S max



P.C.B LAYOUT

		OPERATION		DRAW		SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
		~ 10 ± 0.15		DESIGN		UNIT mm			
		20 ~ 30 ± 0.30		CHECK		SIZE A4		PART NO. PH254H250-SMT-XXP	
0		NEW		APPROVE		SHEET 1/1		TITLE: 2.54mm Pin Header Single Row Straight SMT Type	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	PROJ.			
1									

1 2 3 4 5 6 7 8 9 10

A B C D E F G H