

1 2 3 4 5 6 7 8 9 10

A A

B B

C C

D D

E E


F F

G G




H H

**SPECIFICATIONS**

Current Rating:3 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:550V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:PBT  
 Soldering Temperature:+220°C,10S max

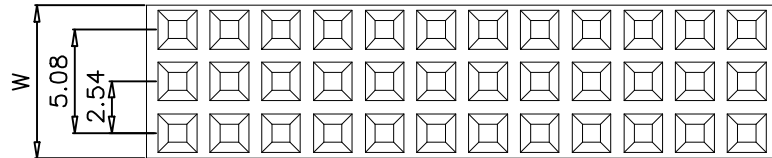

Dimension	
H	W
3.50	5.00
5.00	5.00
5.70	5.00
7.10	5.00
8.00	5.00
8.50	7.00

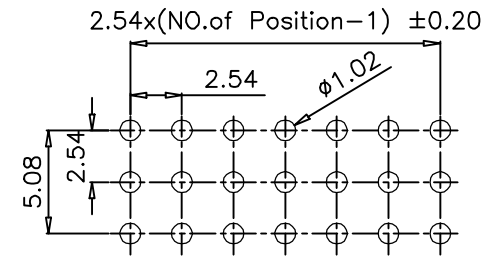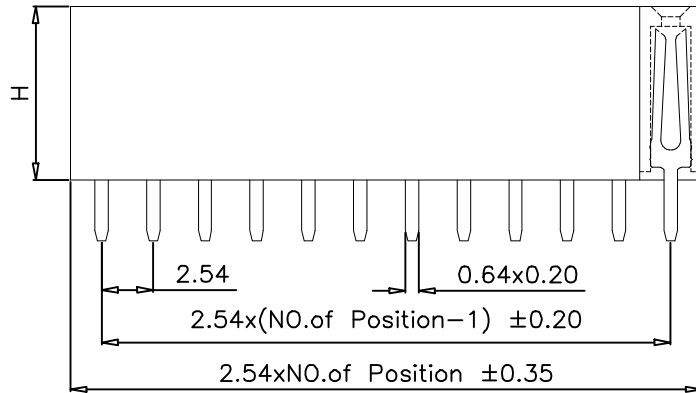

P.C.B LAYOUT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	ROSE.W	2001.03.06	SCALE	UNIT	mm	PART NO.	FH254Hxx-ST-3xXXP
0	05/12/27	NEW			~ 10 ±0.15	DESIGN							
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06					
					30 ~ ±0.50	APPROVE	HELLEN	2001.03.06					
					Angle ± 2'								
					DIM TOL								

**SCONDAR** 森康达电子有限公司  
 SCONDAR ELECTRONIC LIMITED

TITLE: 2.54mm Female Header Triple Row Straight Dip Type

1 2 3 4 5 6 7 8 9 10