


1 2 3 4 5 6 7 8 9 10




A
B
C
D
E
F
G

SPECIFICATIONS

Current Rating:3 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:550V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PBT
 Soldering Temperature:+220°C,10S max

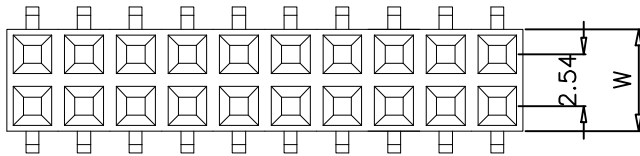

Dimension	
H	W
3.50	5.00
5.00	5.00
5.70	5.00
7.10	5.00
8.00	5.00
8.50	7.00

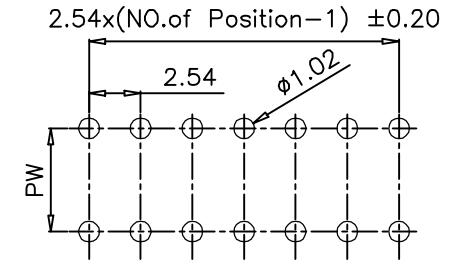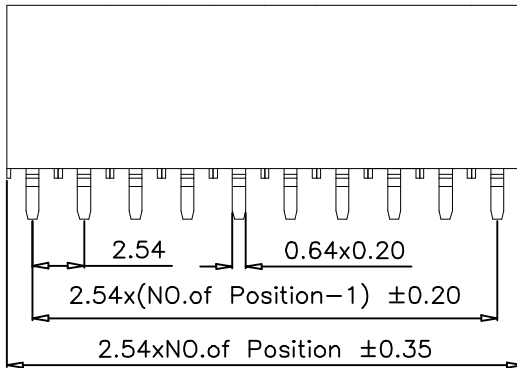

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		SCONDAR 森康达电子有限公司		
					~ 10 ±0.15	DESIGN			UNIT	mm	SCONDAR ELECTRONIC LIMITED		
				20 ~ 30 ±0.30	CHECK		MICKY	2001.03.06	SIZE	A4	PART NO.	FH254Hxx-ST-U-2xXXP	
0	05/12/27	NEW			30 ~ ±0.50		APPROVE	HELLEN	2001.03.06	SHEET	1/1	TITLE:	2.54mm Female Header "U" Dual Row Straight Dip Type
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE			PROJ.	☐ ←			

1 2 3 4 5 6 7 8 9 10