




1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G




SPECIFICATIONS

Current Rating:3 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:550V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PBT
 Soldering Temperature:+220°C,10S max

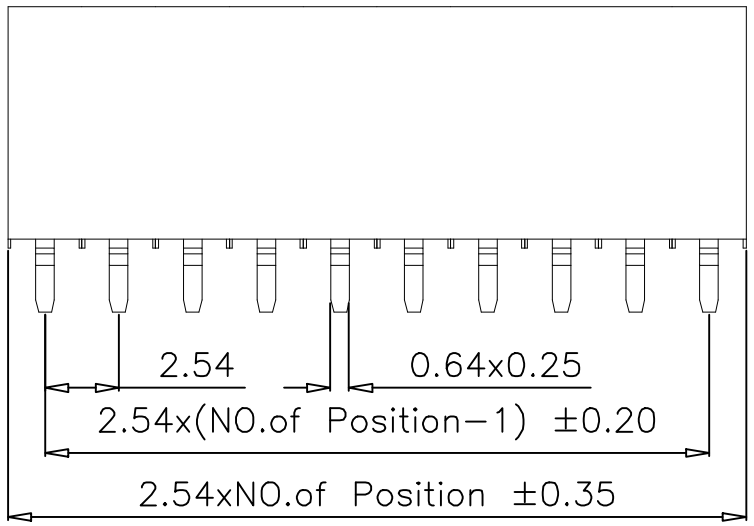

Dimension	
H	W
3.50	2.50
5.00	2.50
5.70	2.50
7.10	2.50
8.00	2.50
8.50	2.50

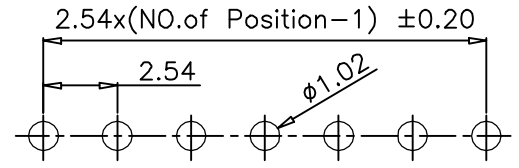

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SIZE	A4	PART NO.	FH254Hxx-ST-U2-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	SHEET	1/1	TITLE:	2.54mm Female Header "U" Single Row Straight Dip Type
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 2' TOL			PROJ.	⊕ ←		

1 2 3 4 5 6 7 8 9 10