


Dimension	
H	W
0.80	3.50
1.00	3.50
1.50	3.40
1.60	3.00
2.00	3.00
2.54	3.00

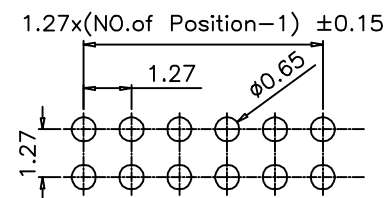

P.C.B LAYOUT

SPECIFICATIONS

Current Rating:1.0 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:300V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:Nylon6T,UL94V-0
 Soldering Temperature:+220°C,10S max

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	ROSE.W	2001.03.06	SCALE	UNIT	mm	PART NO.	TITLE:
0	05/12/27	NEW			~ 10 ±0.15	DESIGN			SIZE	A4		PH127DHxxWxx-ST-2xXXP	1.27mm Pin Header Dual Row Straight Dip Type
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SHEET	1/1			
					30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	PROJ.	☐ ←			

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED

PART NO. PH127DHxxWxx-ST-2xXXP
 TITLE: 1.27mm Pin Header Dual Row Straight Dip Type