
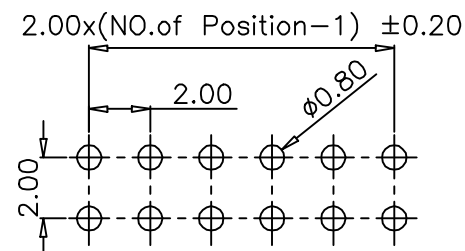
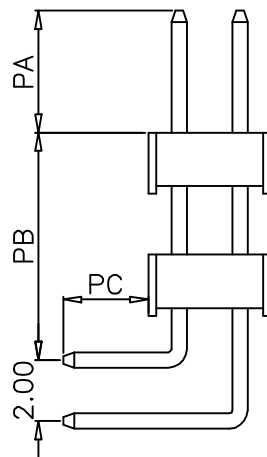


**SPECIFICATIONS**

Current Rating:2 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:450V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:PBT  
 Soldering Temperature:+220°C,10S max

| Dimension |      |
|-----------|------|
| H         | W    |
| 1.00      | 4.00 |
| 1.50      | 4.00 |
| 2.00      | 4.00 |

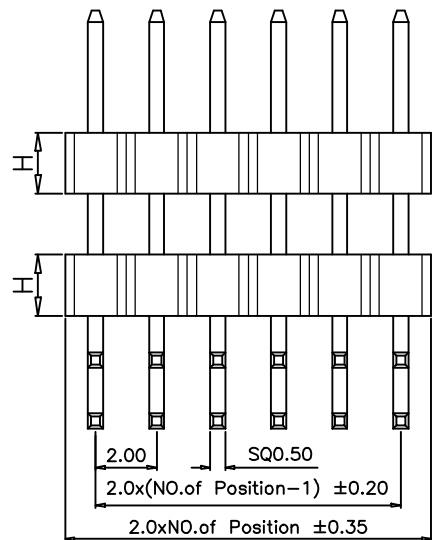

P.C.B LAYOUT

| REV | DATE     | MODIFICATION DESCRIPTION | CHANGE | APPROVE | OPERATION     | DRAW    | ROSE.W | 2001.03.06 | SCALE | UNIT | mm | PART NO. | PH200DHxxWxx-RT-2xXXP                          |
|-----|----------|--------------------------|--------|---------|---------------|---------|--------|------------|-------|------|----|----------|--|
| 0   | 05/12/27 | NEW                      |        |         | ~ 10 ±0.15    | DESIGN  |        |            |       |      |    |          |  |
|     |          |                          |        |         | 20 ~ 30 ±0.30 | CHECK   | MICKY  | 2001.03.06 |       |      |    |          |  |
|     |          |                          |        |         | 30 ~ ±0.50    | APPROVE | HELLEN | 2001.03.06 |       |      |    |          |  |
|     |          |                          |        |         | Angle ± 2'    |         |        |            |       |      |    | TITLE:   | 2.0mm Pin Header Dual Row Right Angle Dip Type |
|     |          |                          |        |         | DIM TOL       |         |        |            |       |      |    |          |  |

**SCONDAR** 森康达电子有限公司  
 SCONDAR ELECTRONIC LIMITED

SIZE A4  
 SHEET 1/1  
 PROJ.