





1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G
H

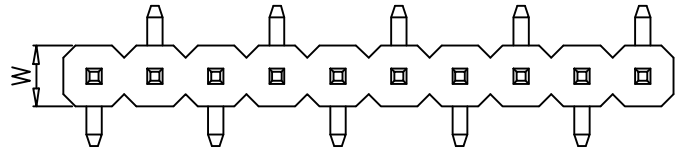

SPECIFICATIONS
 Current Rating: 1.5 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 450V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: PA6T
 Soldering Temperature: +260°C, 5S~8S max

Dimension	
H	W
1.00	2.00
1.50	2.00
2.00	2.00

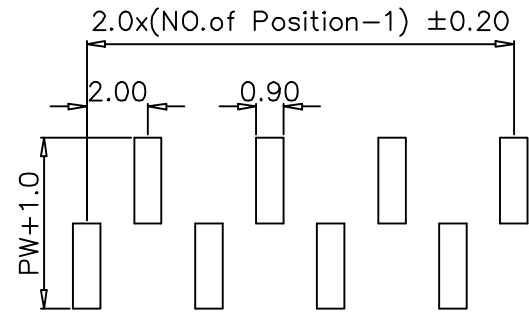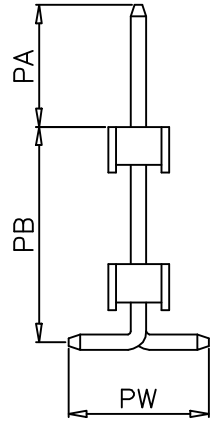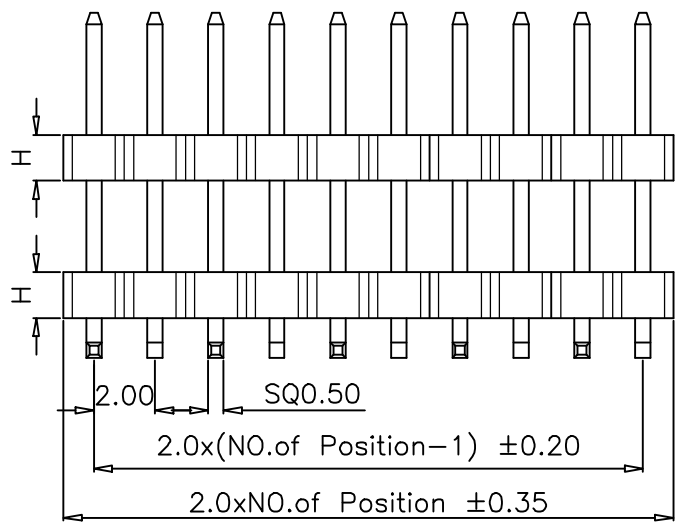

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SIZE	A4	PART NO.	PH200DHxxWxx-SMT-XXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	SHEET	1/1	TITLE:	2.0mm Pin Header Single Row Straight SMT Type
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	⊕ ←		

1 2 3 4 5 6 7 8 9 10