





1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G
H

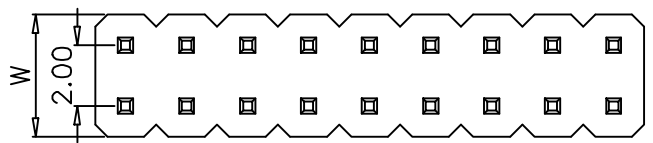

SPECIFICATIONS
 Current Rating: 1.5 Amps
 Insulator Resistance: 1000 Megohms Min.
 Withstanding Voltage: 450V AC/minute
 Temperature Range: -40~+105°
 Contact material: Brass
 Finish: Gold or Tin plated
 Insulator Material: PA6T
 Soldering Temperature: +260°C, 5S~8S max

Dimension	
H	W
1.00	4.00
1.50	4.00
2.00	4.00

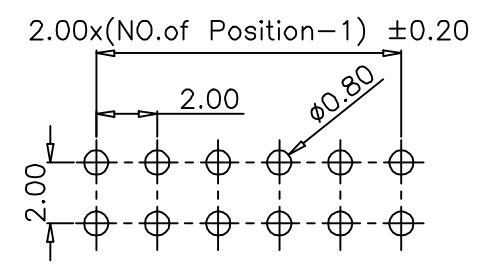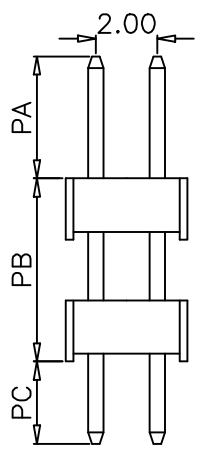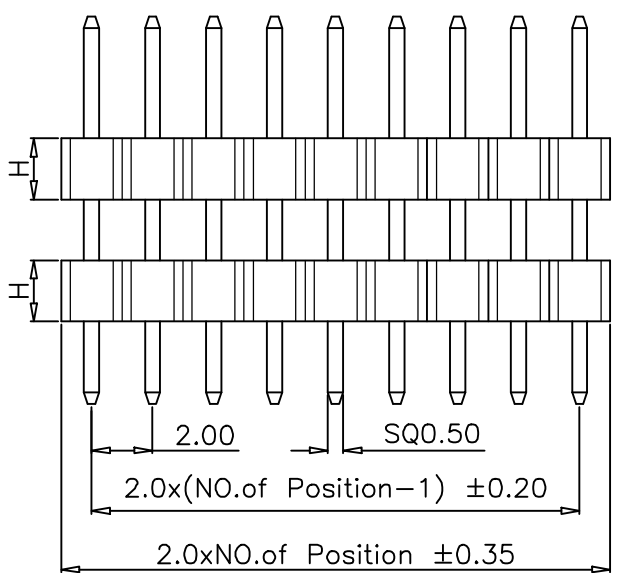

P.C.B LAYOUT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	ROSE.W	2001.03.06	SCALE	UNIT	mm	PART NO.	TITLE:
0	05/12/27	NEW			~ 10 ±0.15	DESIGN						PH200DHxxWxx-ST-2xXXP	2.0mm Pin Header Dual Row Straight Dip Type
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06					
					30 ~ ±0.50	APPROVE	HELLEN	2001.03.06					

SCONDAR 森康达电子有限公司
 SCONDAR ELECTRONIC LIMITED

1 2 3 4 5 6 7 8 9 10