





1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G  
H



**SPECIFICATIONS**  
 Current Rating: 1.5 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 450V AC/minute  
 Temperature Range: -40~+105°  
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: PA6T  
 Soldering Temperature: +260°C, 5S~8S max

| Dimension |      |
|-----------|------|
| H         | W    |
| 1.00      | 4.00 |
| 1.50      | 4.00 |
| 2.00      | 4.00 |

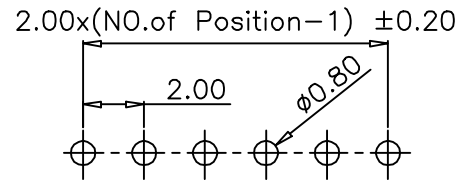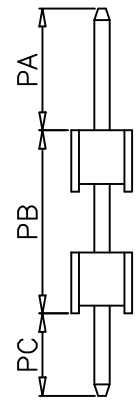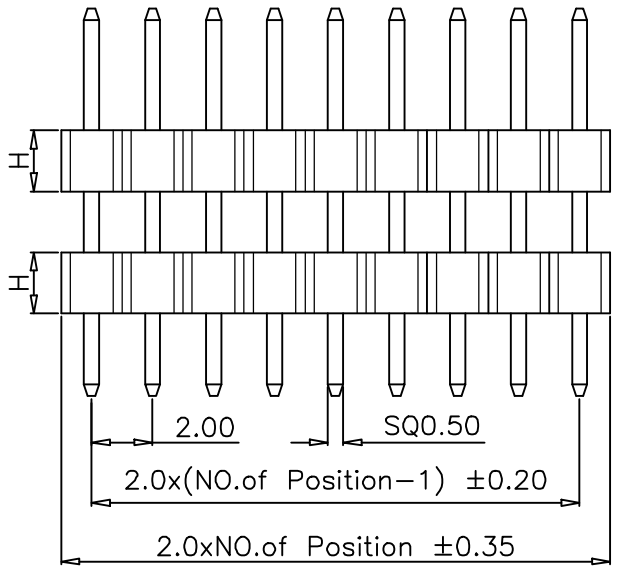

P.C.B LAYOUT

|     |          |                          |  |  |               |         |        |            |       |     |   |  |
|-----|----------|--------------------------|--|--|---------------|---------|--------|------------|-------|-----|---|--|
|     |          |                          |  |  | OPERATION     | DRAW    | ROSE.W | 2001.03.06 | SCALE |     | 森康达电子有限公司<br>SCONDAR ELECTRONIC LIMITED |  |
|     |          |                          |  |  | ~ 10 ±0.15    | DESIGN  |        |            | UNIT  | mm  |   |  |
|     |          |                          |  |  | 20 ~ 30 ±0.30 | CHECK   | MICKY  | 2001.03.06 | SIZE  | A4  | PART NO.                                | PH200DHxxWxx-ST-XXP                              |
| 0   | 05/12/27 | NEW                      |  |  | 30 ~ ±0.50    | APPROVE | HELLEN | 2001.03.06 | SHEET | 1/1 | TITLE:                                  | 2.0mm Pin Header Single Row<br>Straight Dip Type |
| REV | DATE     | MODIFICATION DESCRIPTION |  |  | CHANGE        | APPROVE | HELLEN | 2001.03.06 | PROJ. | ◆ ← |   |  |

1 2 3 4 5 6 7 8 9 10