




1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G




SPECIFICATIONS

Current Rating:1.5 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:450V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PA6T
 Soldering Temperature:+260°C,5S~8S max

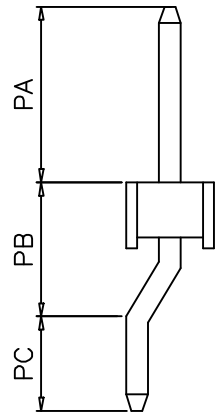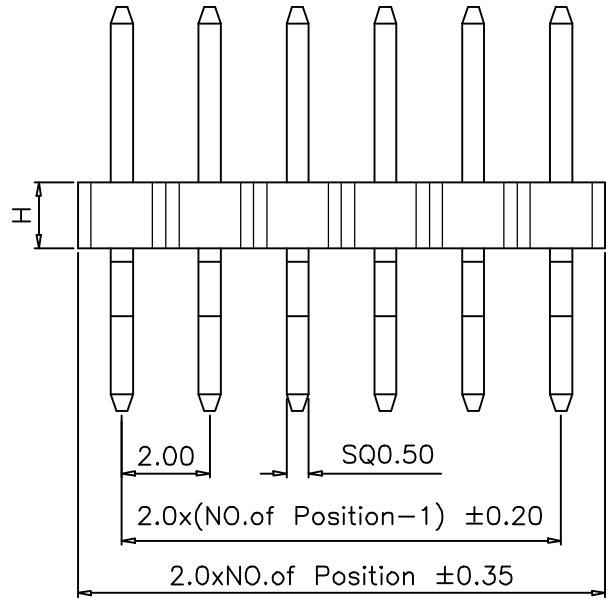

Dimension	
H	W
1.00	2.00
1.50	2.00
2.00	2.00

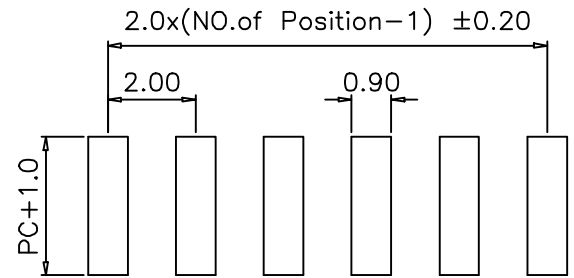

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED
					~ 10 ±0.15	DESIGN			UNIT	mm	
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SIZE	A4	
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2'				PROJ.	☐ ←	
					DIM TOL				TITLE:	2.0mm Pin Header Single Row 90C SMT Type	
									PART NO.	PH200HxxWxx-90C-SMT-XXP	
1											
2											
3											
4											
5											
6											
7											
8											
9											
10											

A
B
C
D
E
F
G
H