


1 2 3 4 5 6 7 8 9 10




A  
B  
C  
D  
E  
F  
G  
H

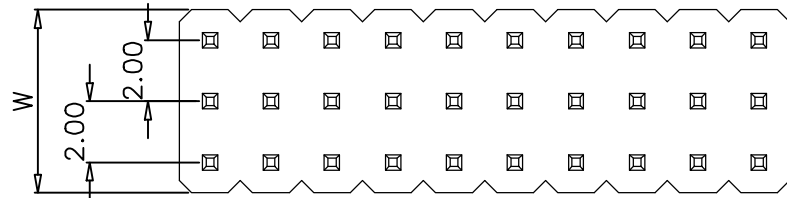

**SPECIFICATIONS**

Current Rating: 1.5 Amps  
 Insulator Resistance: 1000 Megohms Min.  
 Withstanding Voltage: 450V AC/minute  
 Temperature Range: -40~+105°  
 Contact material: Brass  
 Finish: Gold or Tin plated  
 Insulator Material: PA6T  
 Soldering Temperature: +260°C, 5S~8S max

Dimension	
H	W
1.00	4.00
1.50	4.00
2.00	4.00

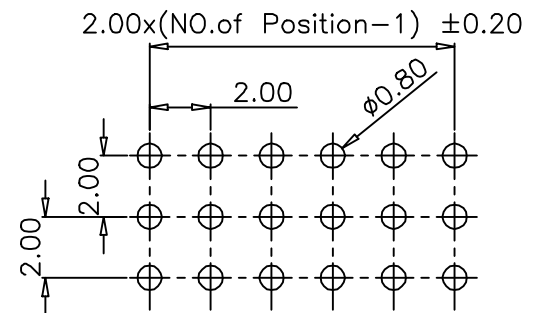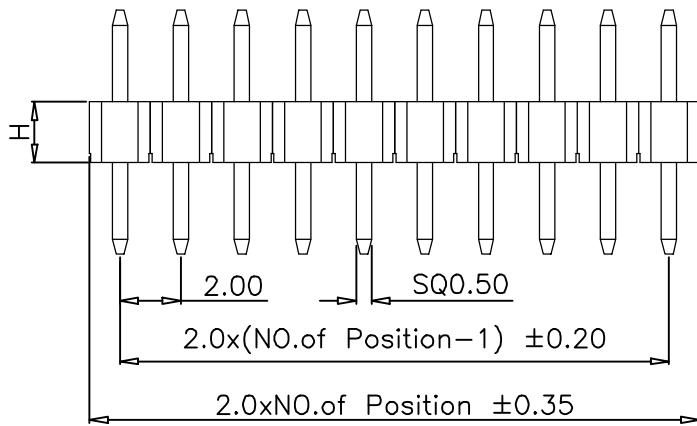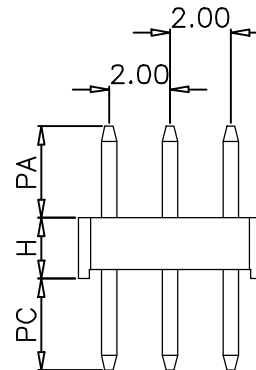

P.C.B LAYOUT

						OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10	±0.15	DESIGN		UNIT	mm		
						20 ~ 30	±0.30	CHECK	MICKY	2001.03.06	SIZE		A4
0	05/12/27		NEW			30 ~	±0.50	APPROVE	HELLEN	2001.03.06	SHEET		1/1
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 2' TOL	PROJ.			TITLE:		PH200HxxWxx-ST-3xXXP

1 2 3 4 5 6 7 8 9 10