

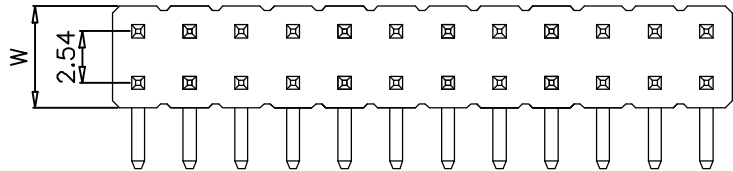


1 2 3 4 5 6 7 8 9 10


A  
B  
C  
D  
E  
F  
G  
H

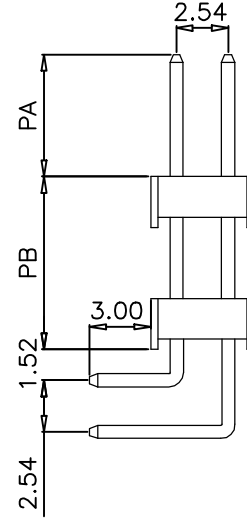

**SPECIFICATIONS**  
 Current Rating:3 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:500V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:PBT  
 Soldering Temperature:+220°C,10S max

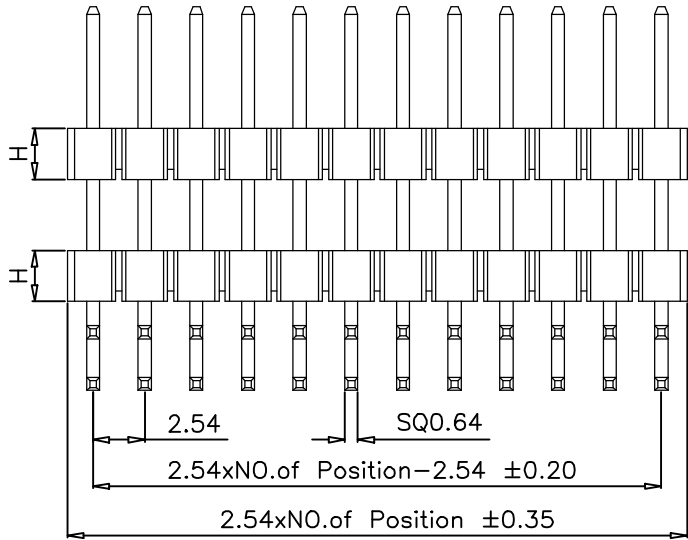

| Dimension |      |
|-----------|------|
| H         | W    |
| 1.50      | 5.00 |
| 1.70      | 5.00 |
| 2.00      | 5.00 |

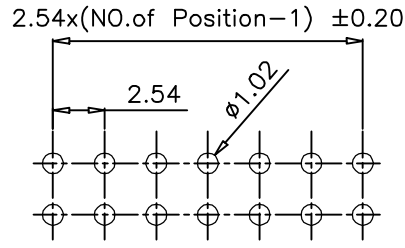

P.C.B LAYOUT

|     |          |  |                          |        |               |         |        |            |       |     |   |   |
|-----|----------|--|--------------------------|--------|---------------|---------|--------|------------|-------|-----|---|---|
|     |          |  |                          |        | OPERATION     | DRAW    | ROSE.W | 2001.03.06 | SCALE |     | 森康达电子有限公司<br>SCONDAR ELECTRONIC LIMITED |   |
|     |          |  |                          |        | ~ 10 ±0.15    | DESIGN  |        |            | UNIT  | mm  |   |   |
|     |          |  |                          |        | 20 ~ 30 ±0.30 | CHECK   | MICKY  | 2001.03.06 | SIZE  | A4  | PART NO.                                | PH254DHxxWxx-RT-2xXXP                           |
| 0   | 05/12/27 |  | NEW                      |        | 30 ~ ±0.50    | APPROVE | HELLEN | 2001.03.06 | SHEET | 1/1 | TITLE:                                  | 2.54mm Pin Header Dual Row Right Angle Dip Type |
| REV | DATE     |  | MODIFICATION DESCRIPTION | CHANGE | APPROVE       | Angle   |        |            | PROJ. | ⊕ ← |   |   |
|     |          |  |                          |        | DIM           | TOL     |        |            |       |     |   |   |

1 2 3 4 5 6 7 8 9 10