


1 2 3 4 5 6 7 8 9 10




A
B
C
D
E
F
G

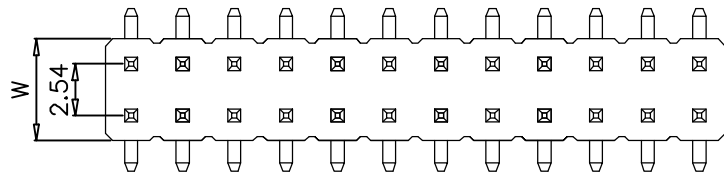

SPECIFICATIONS

Current Rating:3 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:500V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PA6T,UL94V-0
 Soldering Temperature:+260°C,5S~8S max

Dimension	
H	W
1.50	5.00
1.70	5.00
2.00	5.00

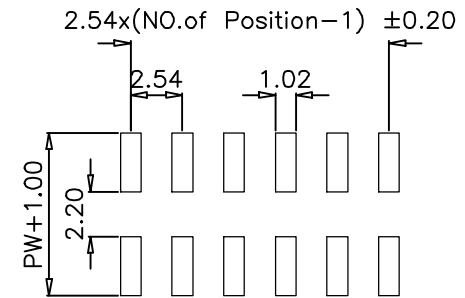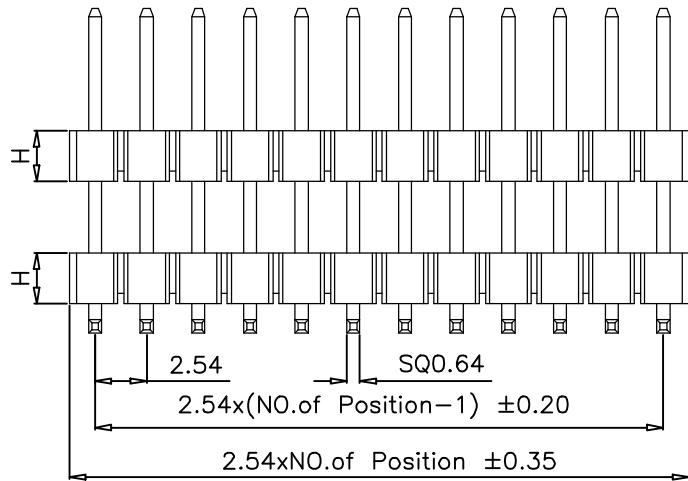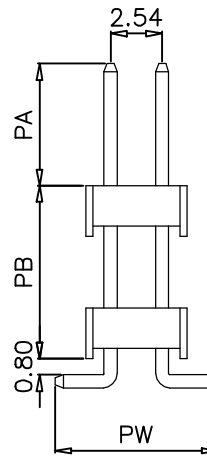

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		SCONDAR 森康达电子有限公司	
					~ 10 ±0.15	DESIGN			UNIT	mm	SCONDAR ELECTRONIC LIMITED	
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SIZE	A4	PART NO.	PH254DHxxWxx-SMT-2xXXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	SHEET	1/1	TITLE:	2.54mm Pin Header Dual Row Straight SMT Type
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	☐		

1 2 3 4 5 6 7 8 9 10