





1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G

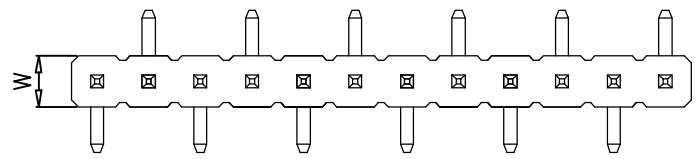

SPECIFICATIONS
 Current Rating:3 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:500V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PA6T,UL94V-0
 Soldering Temperature:+260°C,5S~8S max

Dimension	
H	W
1.50	2.54
1.70	2.54
2.00	2.54
2.50	2.54

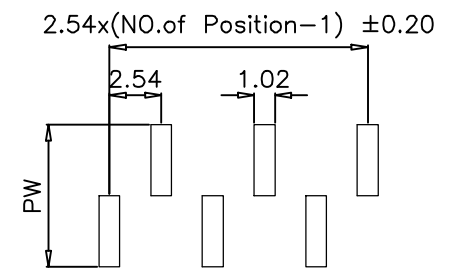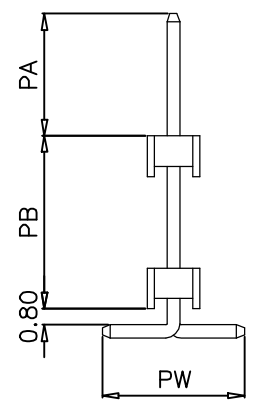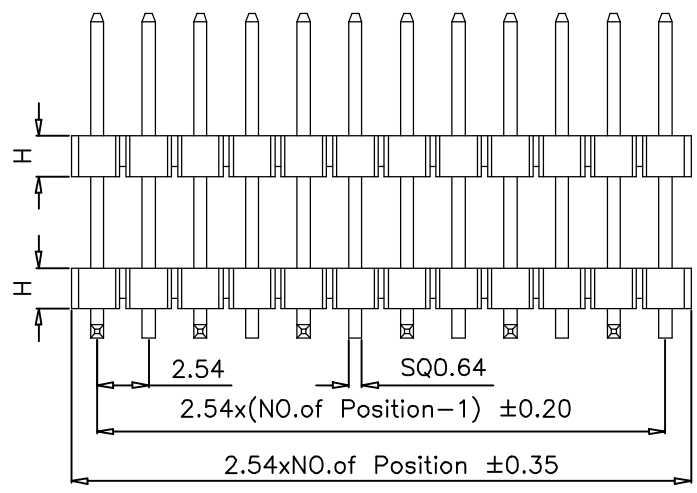

P.C.B LAYOUT

						OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
						~ 10	±0.15	DESIGN		UNIT	mm		
						20 ~ 30	±0.30	CHECK	MICKY	2001.03.06	SIZE		A4
						30 ~	±0.50	APPROVE	HELLEN	2001.03.06	SHEET		1/1
						Angle	± 2'	PROJ.					TITLE:
0	05/12/27		NEW			DIM	TOL					PART NO.	PH254DHxxWxx-SMT-XXP
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE								2.54mm Pin Header Single Row Straight SMT Type

1 2 3 4 5 6 7 8 9 10