
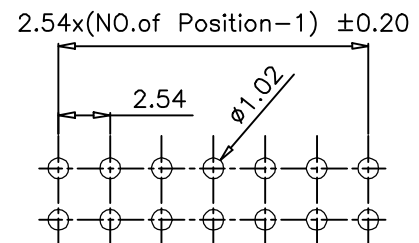
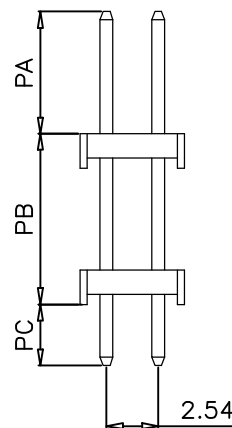


**SPECIFICATIONS**

Current Rating:3 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:500V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:PBT  
 Soldering Temperature:+220°C,10S max

Dimension	
H	W
1.50	5.00
1.70	5.00
2.00	5.00

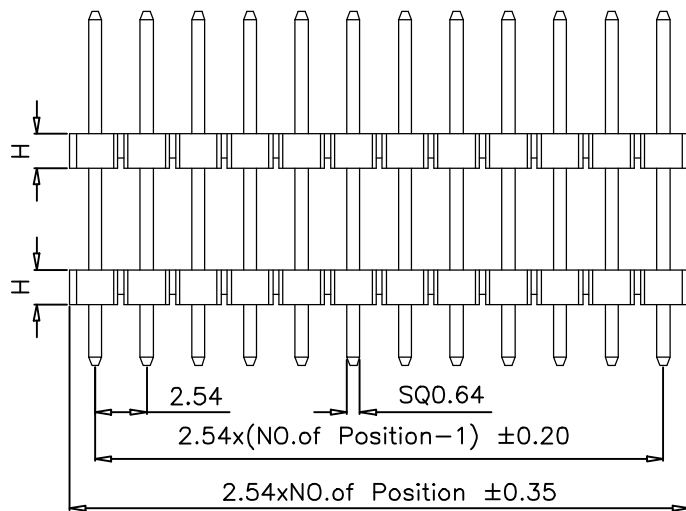

P.C.B LAYOUT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	ROSE.W	2001.03.06	SCALE	UNIT	mm	PART NO.	PH254DHxxWxx-ST-2xXXP
0	05/12/27	NEW			~ 10	±0.15	DESIGN						
					20 ~ 30	±0.30	CHECK	MICKY	2001.03.06				
					30 ~	±0.50	APPROVE	HELLEN	2001.03.06				
					Angle	± 2'						TITLE:	2.54mm Pin Header Dual Row Straight Dip Type
					DIM	TOL							

**SCONDAR** 森康达电子有限公司  
 SCONDAR ELECTRONIC LIMITED

SIZE A4  
 SHEET 1/1  
 PROJ.