




1 2 3 4 5 6 7 8 9 10

A
B
C
D
E
F
G

SPECIFICATIONS
 Current Rating:3 Amps
 Insulator Resistance:1000 Megohms Min.
 Withstanding Voltage:500V AC/minute
 Temperature Range: -40~+105°
 Contact material:Brass
 Finish: Gold or Tin plated
 Insulator Material:PA6T,UL94V-0
 Soldering Temperature:+260°C,5S~8S max

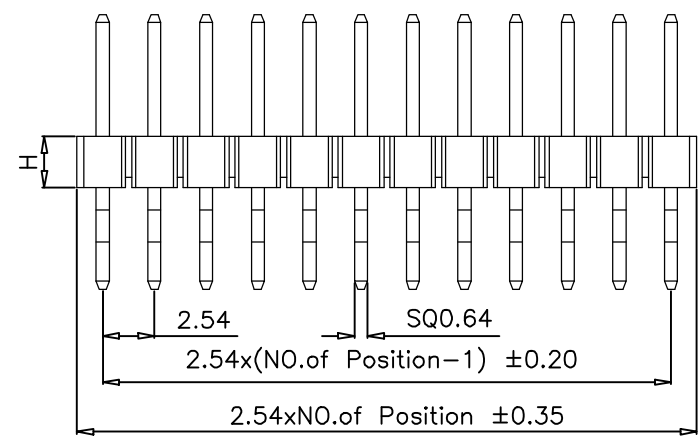

Dimension	
H	W
1.50	2.54
1.70	2.54
2.00	2.54
2.50	2.54

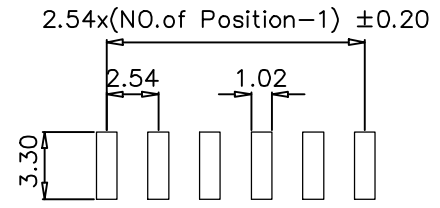

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SIZE	A4	PART NO.	PH254H250-90C-SMT-XXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	SHEET	1/1	TITLE:	2.54mm Pin Header Single Row 90C SMT Type
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	HELLEN	2001.03.06	PROJ.	⊕		

1 2 3 4 5 6 7 8 9 10