
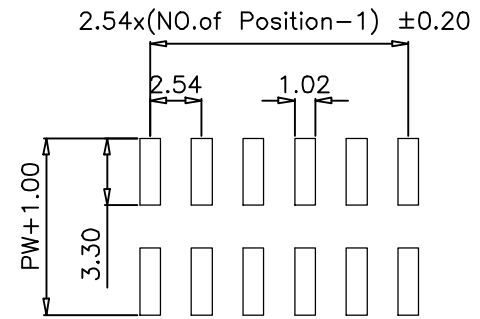



**SPECIFICATIONS**

Current Rating:3 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:500V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:PA6T,UL94V-0  
 Soldering Temperature:+260°C,5S~8S max

Dimension	
H	W
1.50	5.00
1.70	5.00
2.00	5.00

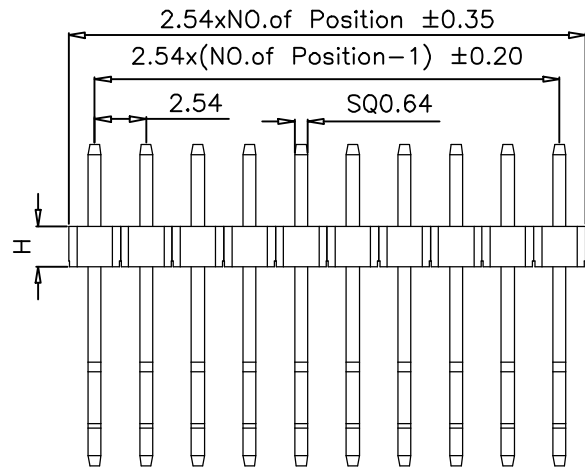

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SIZE	A4	PART NO.	PH254HxxWxx-90C-SMT-2xXXP
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	SHEET	1/1	TITLE:	2.54mm Pin Header Dual Row 90C SMT Type
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE			PROJ.	⊕ ←		