

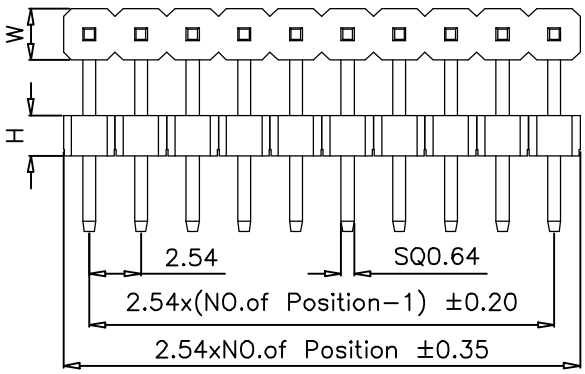



1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G  
H

**SPECIFICATIONS**  
 Current Rating:3 Amps  
 Insulator Resistance:1000 Megohms Min.  
 Withstanding Voltage:500V AC/minute  
 Temperature Range: -40~+105°  
 Contact material:Brass  
 Finish: Gold or Tin plated  
 Insulator Material:PBT  
 Soldering Temperature:+220°C,10S max

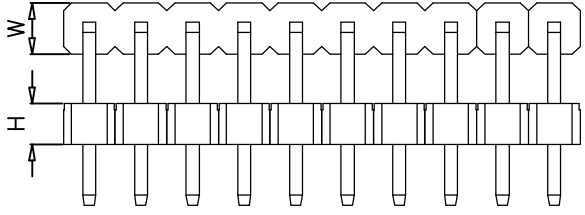

Dimension	
H	W
1.50	2.54
1.70	2.54
2.00	2.54
2.50	2.54

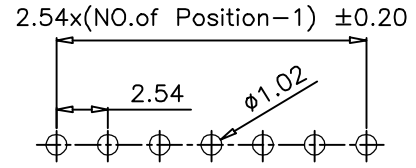

P.C.B LAYOUT

					OPERATION	DRAW	ROSE.W	2001.03.06	SCALE		森康达电子有限公司 SCONDAR ELECTRONIC LIMITED	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK	MICKY	2001.03.06	SIZE	A4	PART NO.	PH254RDHxxWxx-RT-XXP
0	05/12/27		NEW		30 ~ ±0.50	APPROVE	HELLEN	2001.03.06	SHEET	1/1	TITLE:	2.54mm Pin Header Single Row Right Angle Dip Type
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	⊕ ←		

1 2 3 4 5 6 7 8 9 10